


CUSTOM-SIZE TARPAULIN 4x5

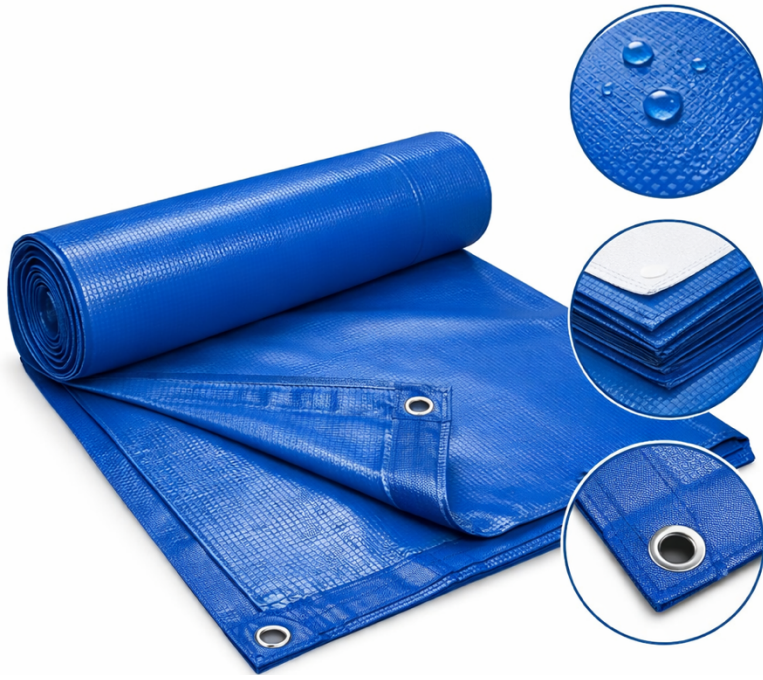

MAIN MATERIALS

MATERIAL

Woven black HDPE fabric laminated with LDPE coating on both sides, with aluminum eyelets on all four sides every 100 cm

UV RESISTANCE

Maximum 5% loss in mechanical strength after exposure to 1500 hours of UV

TEMPERATURE RESISTANCE

-20°C to +80°C

TENSILE STRENGTH

Minimum 600 N in warp and weft (according to BS 2576, 50 mm grip test or equivalent)

TEAR STRENGTH

Minimum according to ISO 4674 in warp and weft directions

COLOR

White on both sides; internal black fibers to ensure opacity

LOGO PRINTING

Available upon customer request

DIMENSIONS

4 x 5 m $\pm$ 1%

200 g/m² $\pm$ 20 g (approx. 3.8 kg per piece)

PACKAGING

Bale, 5 pcs per unit, 75 x 55 x 12 cm, 19 kg, 0.050 m³

PALLETIZATION

20 bales per pallet, 115 x 75 x 115 cm, 429 kg, 0.992 m³

LOADING

20FT DC: 3000 | 40FT DC: 6000 | 40FT HC: 6300