


TARPAULIN WITH REINFORCED STRIPES

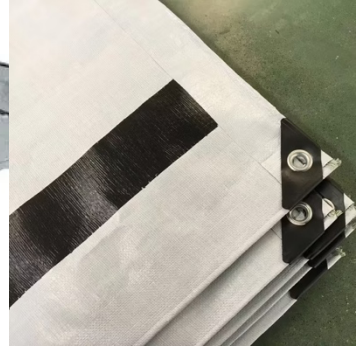

MAIN MATERIALS

MATERIAL

Woven black HDPE fabric laminated with LDPE coating on both sides, with aluminum eyelets on all four sides every 100 cm

UV RESISTANCE

Maximum 5% loss in mechanical strength after exposure to 1500 hours of UV

TEMPERATURE RESISTANCE

-20°C to +80°C

TENSILE STRENGTH

Minimum 600 N in warp and weft (according to BS 2576, 50 mm grip test or equivalent)

TEAR STRENGTH

Minimum according to ISO 4674 in warp and weft directions

COLOR

White on both sides; internal black fibers to ensure opacity

LOGO PRINTING

Available upon customer request

DIMENSIONS

4 x 5 m $\pm$ 1% / 4 x 6 m $\pm$ 1%

200 g/m² $\pm$ 20 g (approx. 3.8 kg per piece)

PACKAGING

Bale, 5 pcs per unit, 75 x 55 x 12 cm, 19 kg, 0.050 m³

PALLETIZATION

20 bales per pallet, 115 x 75 x 115 cm, 429 kg, 0.992 m³

LOADING

20FT DC: 3000 | 40FT DC: 6000 | 40FT HC: 6300